



# NGZ 12

## ON-delay single-range time relay

- Multi-voltage for AC/DC 24 to 240 V
- 1 function, ON-delay
- 13 time ranges available
- 2 changeover contacts
- 2 LEDs for function display

### Time ranges

Available time ranges:

≤ 0.1 to 1 s	0.5 to 10 min
0.15 to 3 s	1.5 to 30 min
0.5 to 10 s	3 to 60 min
1.5 to 30 s	0.5 to 10 h
5 to 100 s	1.5 to 30 h
15 to 300 s	5 to 100 h
50 to 1000 s	


### Features

#### Setting the time delay

The required delay time is set with a setting wheel. You can adjust it with a screwdriver.


LEDs show the state of the excitation input and the position of the contacts. You can monitor the countdown on a flashing LED.

### Connection diagram



KS 250-3

### Dimensions

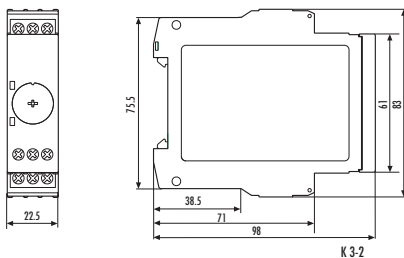


### Ordering designation

**NGZ 12** plus time range

Price code: 68.1


## Functions

Function code 11 = ON-delay



$t_A$  = Operating time  
 $t_1$  = Break time, must be > recovery time 1  
 $t_2$  = Break time, must be > recovery time 2

#### Legend

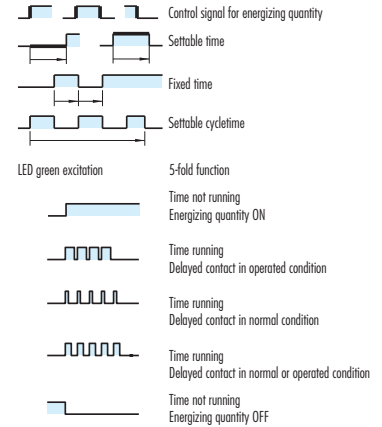

### Note

The device is designed for multi-voltage. Connect phase L1 or L + to terminal A1 and neutral N or M to terminal A2.

You can change the delay time during operation. The change is effective immediately.

## Technical data

<b>Device type</b>	<b>NGZ 12</b>														
<b>Product norm</b> (Time relays)	EN 61812 - 1:1999 - 08														
Relay function according to IEC 60050	445-01 - 02														
Function diagram	FD 250 - 2														
Function display	2 LEDs green														
Ambient operating temperature range	-25 to + 60 °C														
<b>Input circuit</b>															
Rated voltage A1 - A2	AC/DC 24 to 240 V														
Rated power AC	3.5 VA/1.7 W														
Rated power DC	1.6 W														
Rated voltage limits	70 to 110 %														
Rated frequency $f_n$	50 to 60 Hz $\pm$ 5 %														
Release value of input voltage (line capacitance approx. 150 pF/m)	$\geq$ AC/DC 10 V; permissible line capacitance 0.2 $\mu$ F														
Parallel load permitted	A1 - A2 yes														
Internal one-way rectifier	A1 - A2 no														
<b>Time circuit</b>															
Time setting / number of time ranges	analog/1														
Setting ranges for time delay	from $\leq$ 0.1 s to 100 h, available in ranges:														
	<table style="width: 100%; border: none;"> <tr> <td><math>\leq</math> 0.1 to 1 s</td> <td>0.5 to 10 min</td> </tr> <tr> <td>0.15 to 3 s</td> <td>1.5 to 30 min</td> </tr> <tr> <td>0.5 to 10 s</td> <td>3 to 60 min</td> </tr> <tr> <td>1.5 to 30 s</td> <td>0.5 to 10 h</td> </tr> <tr> <td>5 to 100 s</td> <td>1.5 to 30 h</td> </tr> <tr> <td>15 to 300 s</td> <td>5 to 100 h</td> </tr> <tr> <td>50 to 1000 s</td> <td></td> </tr> </table>	$\leq$ 0.1 to 1 s	0.5 to 10 min	0.15 to 3 s	1.5 to 30 min	0.5 to 10 s	3 to 60 min	1.5 to 30 s	0.5 to 10 h	5 to 100 s	1.5 to 30 h	15 to 300 s	5 to 100 h	50 to 1000 s	
$\leq$ 0.1 to 1 s	0.5 to 10 min														
0.15 to 3 s	1.5 to 30 min														
0.5 to 10 s	3 to 60 min														
1.5 to 30 s	0.5 to 10 h														
5 to 100 s	1.5 to 30 h														
15 to 300 s	5 to 100 h														
50 to 1000 s															
Recovery time 1/2	$\leq$ 50/ $\leq$ 50 ms														
Minimum ON time 1/2	- / - ms														
Setting tolerance	$\leq$ $\pm$ 5 %														
Repeatability (to set value)	$\leq$ $\pm$ 0.01 % + $\pm$ 10 ms														
Influence of temperature (within range)	$\leq$ $\pm$ 0.002 %														
Influence of voltage (within range)	$\leq$ $\pm$ 0.002 %														
<b>Output circuit</b>															
Contact equipment	2 changeover contacts														
Contact material	AgNi 90/10														
Rated operating voltage	AC/DC 24 to 240 V														
Rated value for limiting continuous current $I_{th}$	5 A														
Minimum contact load	$\geq$ AC/DC 5 V/ $\geq$ 10 mA														
Utilization category according to IEC 60947 - 5 - 1	AC-15 $U_e$ AC 230 V, $I_e$ 3 A DC-13 $U_e$ DC 24 V, $I_e$ 2 A														
Permissible switching frequency	$\leq$ 3600 switching cycles/h														
Mechanical service life	30 x 10 <sup>6</sup> switching cycles														
Electrical service life															
20/2 A, AC 250 V, $\cos \varphi = 0.3$	0.12 x 10 <sup>6</sup> switching cycles AC-15														
Operate time / release time for excitation A1 - A2	40 ms														
<b>Other data</b>															
Clearance/creepage distances to IEC 60664 - 1															
Contamination level	3 outside, 2 inside														
Overvoltage category	III														
Rated voltage	AC/DC 275 V														
Protection class housing / terminals acc. to IEC 60529	IP 40/IP 20														
Interference immunity acc. to IEC 61000 - 4	Test level 3														
Dimensions (housing)	K 3 - 2														
Terminal connection diagram	KS 250 - 3														
Connection cross sections single or fine wire	1 x 0,2 to 6 or 2 x 0,2 to 2,5 mm <sup>2</sup>														
fine wire with connector sleeve	1 x 0,4 to 4 or 2 x 0,2 to 1,5 mm <sup>2</sup>														
Weight	0.11 kg														
<b>General Technical Specifications</b>	NGG Catalogue														